

CNC Slant Bed Lathes

Roturn 402 C

SKU : 180628

This machine of the ROTURN C series impresses with the classic virtues of a compact CNC production lathe. With its Siemens 828 D Basic control, it meets all the requirements for current control technology. The inclined bed machine with 8-station tool turret and powerful 15 kW (20 hp) main spindle motor has a hydraulic 3-jaw chuck with through-hole. The tailstock is equipped with a hydraulically operated quill and a large stroke. A flat top conveyor and a high-performance coolant system round out the standard equipment.

- Powerful main spindle motor
- 8 station tool turret
- Includes chip conveyor
- Siemens 828 control
- Chuck with through-hole



TECHNICAL SPECS

WORKING AREA

Workpiece length (max.)	420 mm
Center height	200 mm
Turning diameter over bed	400 mm
Turning diameter over support	250 mm

TRAVELS

Travel X-axis	200 mm
Travel Z-axis	425 mm

HEADSTOCK

Lathe chuck diameter	250 mm
Speed range	50 1/min - 2000 1/min
Spindle mount	A2-8
Spindle bore	86 mm
Spindle bore with draw tube	75 mm

RAPID FEED

Rapid feed X-axis	16000 mm/min
Rapid feed Z-axis	20000 mm/min

TOOLING

Number of tool stations	8 positions
Boring bar mount Ø	40 mm

TAILSTOCK

Tailstock taper	5 MT
Tailstock quill diameter	88 mm
Tailstock quill stroke	85 mm

DRIVE CAPACITY

Main motor rating	15 / 11 kW
Motor rating coolant pump	0.18 kW

MEASURES AND WEIGHTS

Overall dimensions (length x width x height)	3.8 m x 1.87 m x 1.91 m
Weight	3400 kg




Siemens Sinumerik 828 D - a compact and user-friendly solution for lathes




Pressure gauge for pressure monitoring



Central lubrication device and maintenance unit

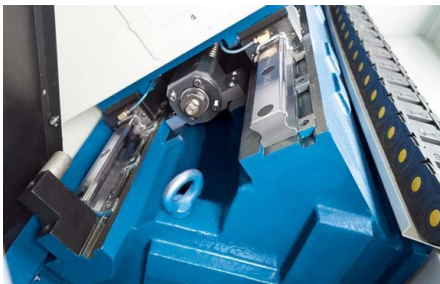

Central lubrication device and maintenance unit

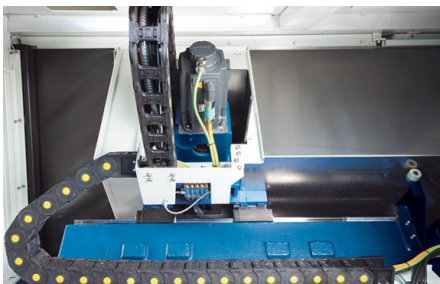

Siemens drive (here X-axis)

PRODUCT DETAILS

Highlights

- Future-proof: the Siemens 828 D Basic control meets all requirements for advanced control technology
- A hydraulic 3-B chuck with passage is included in the scope of delivery as standard
- Hinged belt conveyor and high-performance coolant system included in standard equipment

Machine Design

- Heavy machine frame with inclined bed ensuring high rigidity and easy chip removal
- Precise linear guides in X and Z for high stability and accuracy even at highest loads
- The enclosed work space is easily accessible through a large sliding door
- Tailstock with hydraulically operated quill with a maximum stroke of 85 mm
- Automatic central lubrication system ensures reliable lubrication of guideways

Spindle

- Max. Spindle speed 3.000 1/min (Roturn 400C) or 2.000 1/min (Roturn 402C)
- Motor power 11/15 kW

Tool Changer

- The 8-station tool turret ensures a large work area and quick and precise tool changes

STANDARD EQUIPMENT

Siemens 828 D control
 Hydr. 250 mm 3-jaw lathe chuck with through-hole
 Hydr. tailstock
 Automatic central lubrication
 Chain-type chip conveyor
 Heat Exchanger for electric control cabinet
 Closed work space
 LED work lamp
 Coolant system
 Air gun
 Coolant system flush gun
 Operating tools
 Operator manual

OPTIONAL EQUIPMENT

- Preparation Barfeeder Interface, SKU : 270250



KNUTH on YouTube

Information to the point

On our YouTube channel you can find videos for nearly all machines from our program. We show the machines from current deliveries and you get an impression of the handling, the processing quality and the machining performance.

**Are you interested in a machine for which you cannot find a current video?
Please feel free to contact us!**